


Using the arrows to traverse through the menu up, down, forward and reverse. Use the enter button to choose your selection.

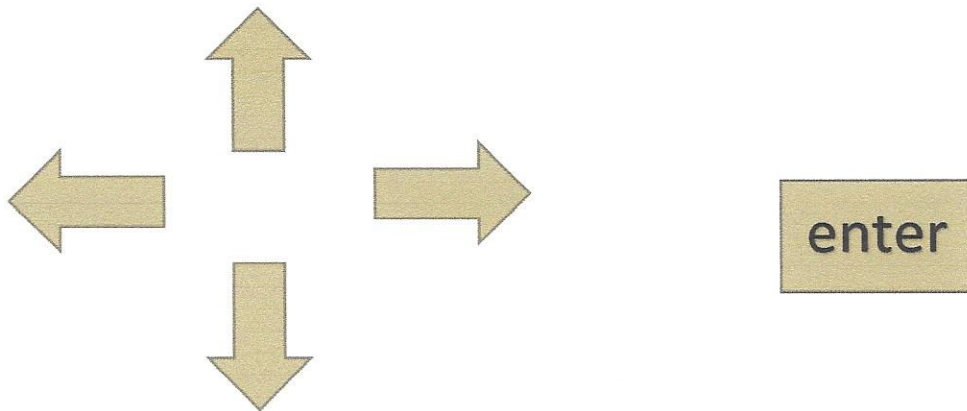

Print configuration:

Encoder speed/Res

External – For mounted external encoders only. Will not print if on this setting and no encoders is connected

Internal – draft- select speed

Direct/Orient-

Which direction of travel is the product coming from? Sensor on **left** is **forward** versus sensor on **right** is **reverse**.

External ToF

Disabled – Sensor will not sense product and will keep printing automatically based off ToF Delay.

Enabled- Sensor is on and will sense product and print based off of ToF Delay setting.

ToF Delay

Will delay the start of the print from .50” to 36” depending on the need

Density

Ability to adjust ink usage from 6.25% to 100%.

Internal Encoders Speed

Speed setting to high will be long and double print. May also miss the product completely.

COODERS

Speed setting to low will be condensed and double print.

COODERS