

CORRUGATED CASE TRANSPORTS

The perfect off-line solution for transporting flat corrugated cases and die cuts sheets. Reduces inventory when used with a label applicator, lnk jet and RFID'S.




Model 2480 shown with options.

SPECIFICATIONS:

- Variable speed DC motor drive
- Feed rate: up to 50/minute (label rate varies by application)
- Quick adjust magazine feed
- Wide lug plate chain provides positive feed
- Power requirements: 220 Volt, 50/60 Hz. single phase
- Motor: 1 Hp totally enclosed, fan cooled, variable speed with dial control.
- Electrical controls: NEMA Type 1
- Discharge height: 37" (940MM)
- · Finish: Kiwi Blue

OPTIONAL ITEMS

- Power anti-fiction slide top mounting system (shown)
- 5 foot roller conveyor catcher (shown)
- Model SC stacker conveyor
- Predetermining or totalizing counter

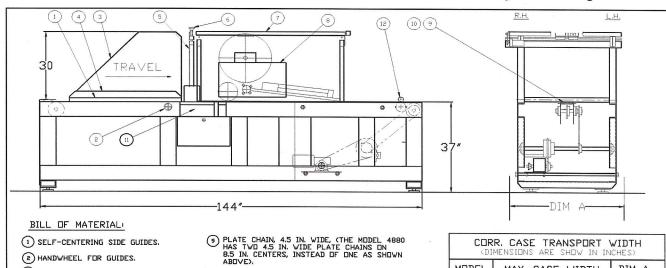

- (2) HANDWHEEL FOR GUIDES.
- (3) MAGAZINE GUIDE PLATE, LEFT SIDE.
- (4) MAGAZINE GUIDE PLATE, RIGHT SIDE.
- 5 GATE ASSEMBLY.
- 6 HANDWHEEL FOR GATE ASSEMBLY.
- POWERED ANTI-FRICTION SLIDE MOUNTING SYSTEM, (OPTIONAL).
- B LABEL APPLICATOR, (CUSTOMER TO SUPPLY).
- (10) LUGS FOR PLATE CHAIN ON 48 IN. CHAIN CENTERS, COPTIONAL CHAIN CENTERS 24 IN. & 72 IN.).
- (11) ELECTRICAL CONTROL PANEL.
- 12 OPTIONAL, OUTPUT SPEED-UP ROLLER. THIS IS A REQUIRED OPTION ON ANY MACHINE WITH AN OPTIONAL SC STACKER CONVEYOR.

	(DIMENSIONS ARE SHOW IN INCHES)		
000000000000000000000000000000000000000	MODEL	MAX. CASE WIDTH	DIM A
	2480	26″	43"
	3480	36″	53″
	4880	50″	67"

NOTE: THE SIZE OF THE POWERED SLIDE FOR THE LABEL APPLICATOR VARIES ACCORDING TO THE LABEL APPLICATOR USED.

Kiwi Coders Corporation, 265 E. Messner Dr. Wheeling, IL 60090 USA 847-541-4511 (phone) 847-541-6332 (fax)

e-mail: info@kiwicoders.com Website: www.kiwicoders.com

Bulletin 840