

Series 1030 Transport

For automatically feeding folding cartons, cards, and other flat items. Ideal for use with label applicators and small character ink jet and RFID.


SPECIFICATIONS:

- Variable speed DC motor drive.
- Feed Rate: up to 80 per minute. (Label rate varies by application)
- Quick adjust magazine feed.
- Individually adjustable guides.
- Totalizing Counter.
- Positive chain lug feed from bottom of magazine stack of cartons or cards.
- Electrical Controls: NEMA Type 4
- Power Requirements: 115V, 50/60 Hz or 220V, 50/60 Hz. Single phase, 15A max.
- Finish: Kiwi blue
- Shipping Weight: Approx. 1000 lbs.

OPTIONS:

- Vacuum Feed.
- Output Shingling Conveyor
- Powered Anti-friction slide mounting system.
- High Speed Feed (variable: 0-160 per minute).



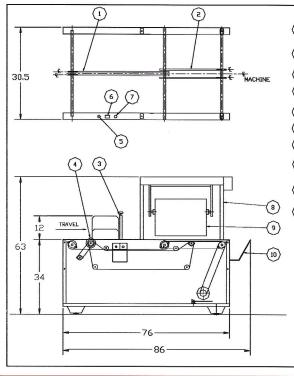

- (1) INPUT CONVEYOR BLOCK CHAINS, WITH LUGS ON 24 IN. CENTERS, 96 IN. LONG, (2 REQ'D.).
- (2) DUTPUT ROLLER CHAINS, WITH LUGS ON 24 IN. CENTERS, 96 IN. LONG, (2 REQ'D.).
- (3) GATE ASSEMBLY
- 4 HAND WHEEL FOR MAGAZINE GUIDE ADJUSTMENT.
- (5) STOP BUTTON.
- (6) COUNTER
- 7 START BUTTON.
- (8) POWERED ANTI-FRICTION SLIDE MOUNTING SYSTEM, (OPTIONAL).
- (9) LABEL APPLICATOR, (CUSTOMER TO SUPPLY).
- (10) CATCHER, (SHINGLING CONVEYOR OPTIONAL).

	M□DEL 1030-18		
	HTDIW (MM).NI	RUNNING LENGTH ① IN(MM)	THICKNESS IN.(MM)
MIN	6 (152)	2 (51)	.022 (.56)
MAX	17 (432)	20 (508)	.375 (9.5)

CONSULT FACTORY FOR OTHER REQUIREMENTS.
NOTES: MEASURED IN DIRECTION OF FLOW THROUGH
MACHINE.

WIDER MACHINES AVAILABLE ON SPECIAL
 ORDER.

Kiwi Coders Corporation, 265 E. Messner Dr. Wheeling, IL 60090 USA 847-541-4511 (phone) 847-541-6332 (fax)

e-mail: info@kiwicoders.com Website: www.kiwicoders.com Bulletin 830